

Hoses for ventilation


Quick-Action couplings

The Geovent quick-action couplings for medium pressure are manufactured in powder coated steel (RAL 1007). The quick-action couplings are supplied for installation on the wall or suspended from the ceiling. The couplings are ideal for systems with several non-simultaneous extraction spots. The hose part is also manufactured in powder coated steel. The solid spring-loaded lid locks the hose part and switches off the airflow. The ranges of use are numerous - for example extraction of welding fumes, exhaust fumes, dust, etc. The dimensions are $\varnothing 80$ and $\varnothing 100$ mm.



Quick-action couplings

Dimensions

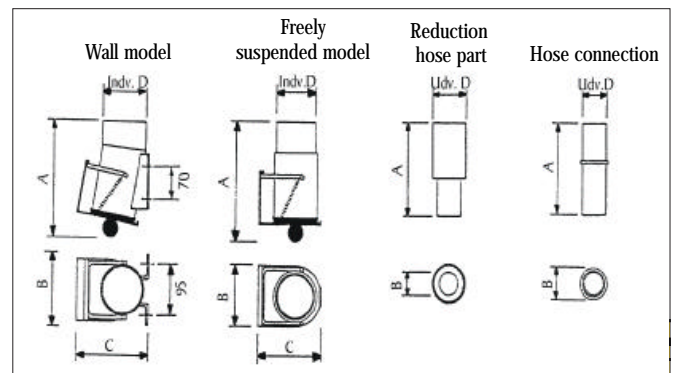

Art. No	Description
05-005	Quick coupling 80V for wall mounting
05-008	Quick coupling 80L hanging
05-006	Quick coupling 100V for wall mounting
05-009	Quick coupling 100L hanging

Ordering table - Couplings for medium pressure

Area of Application	Model	Max. Air-flow (m ³ /h)	Art. no.				Measurements in (mm)			
			Vægk.	Løsh. k.	R. sl. Del f/k	Sl. Del f/k	A	B	C	D
Welding-fumes	80	300-400	05-005	-	-	-	255	115	160	80
	80	300-400	-	05-008	-	-	256	100	135	76
Oil Mist Soldering Fumes	80	300-400	-	-	-	05-011	250	87	-	75
	100/80	400-600	-	-	05-013	-	250	75	-	100

Grinders Lathes	100	400-600	05-006	-	-	-	260	130	175	100
	100	400-600	-	05-009	-	-	256	130	157	100
	100	400-600	-	-	-	05-014	250	112	-	100