


Damper RSK

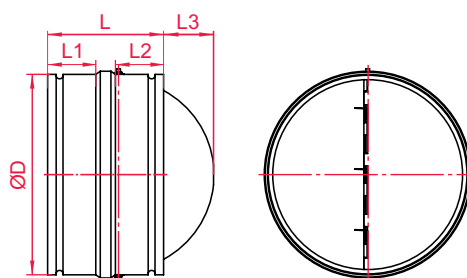

Description

Back draft circular dampers RSK are used in circular ducting. They allow circulation of air in one direction only. They are mounted into a system of round air ducts. The damper casing is made of galvanized steel. Blades are made of aluminium, they are spring-loaded. Shutter RSK has to be installed as it is shown in the picture: shaft stands vertically rubber ring is fitted inside.

RSK [Item number]	D* [mm]	L [mm]	L1 [mm]	L2 [mm]	L3 [mm]	Weight [kg]	Packing	Multipack
FIT000171	100	92	39	35	11	0,2	P12	64
FIT000173	125	92	39	35	24	0,2	P12	64
FIT000174	150	92	39	35	36	0,3	P6	55
FIT000176	160	92	39	35	41	0,3	P4	63
FIT000178	200	92	39	35	61	0,4	P4	54
FIT000180	250	127	57	53	67	0,7	P2	24
FIT000182	315	127	57	53	101	0,9	P2	36
FIT000183	355	196	103	75	73	1,4	P1	12
FIT000184	400	196	103	75	96	1,6	P1	10
FIT000389	450	196	103	75	121	1,8	P1	8
FIT000383	500	196	103	75	146	2,0	P2	3

* - nominal.